

7-17-00

A

## CHRISTOPHER P. MAIORANA, P.C.

24025 Greater Mack, Suite 200  
St. Clair Shores, Michigan 48080Utility Patent Application Transmittal  
(Only for new non-provisional applications Under 37 CFR 1.53(b))ASSISTANT COMMISSIONER FOR PATENTS  
Washington, D. C. 20231Case Docket No. 0325.00371Date: July 14, 2000

Sir:

Transmitted herewith for filing is a patent application of:

Inventor(s): Pankaj K. Jha

For: HYBRID DATA TRANSPORT SCHEME OVER OPTICAL NETWORKS

Enclosed are:

1. ☒ Specification (30 pages); Claims (5 pages); Abstract (1 page)
2. ☒ 8 sheets of formal drawings.
3. ☒ Oath or Declaration Total Pages 2
  - a. ☒ Newly executed (original or copy)
  - b. ☐ Copy from a prior application (37 CFR 1.63(d))  
(for continuation/divisional with Item 5 completed)
  - c. ☐ Copy of Revocation of Previous Power
4. ☐ Incorporation By Reference (usable if Item 3b is checked)  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Item 3b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
5. ☐ If a Continuing Application, check appropriate box and supply the requisite information below and in a preliminary amendment:  
  
☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP)  
of prior application no.:
6. ☒ An assignment to CYPRESS SEMICONDUCTOR CORP. along with PTO form 1595.
7. ☐ A PTO Form 1449 with a copy of the references not previously cited.
8. ☒ Return Receipt Postcard
9. ☐ Other:



0325.00371-07-14-00

The filing fee has been calculated as shown below:

	No. Filed	No. Extra	Fee	Amount
Basic Fee	--	--	--	\$690.00
Total Claims	20	0	x \$ 18.00	\$ 0.00
Indep. Claims	3	0	x \$ 78.00	\$ 0.00
Mult. Dep. Claims			\$260.00	\$ 0.00

SUB-TOTAL ..... \$690.00

SMALL ENTITY STATUS (divide SUB-TOTAL by two) ..... \$

X Assignment Recordal Fee (\$40.00) ..... \$ 40.00

TOTAL ..... \$730.00

X A check in the amount of \$730.00 to cover the filing fee is enclosed.

X The Commissioner is hereby authorized to charge any fees under 37 CFR 1.16 and 1.17 which may be required by this paper or associated with this filing to Deposit Account No. 50-0541. A duplicate copy of this sheet is enclosed.

Correspondence Address:



Customer Number or Bar Code Label:

**21363**

PATENT TRADEMARK OFFICE

**CERTIFICATE OF EXPRESS MAILING**

I hereby certify that this paper (along with any paper referred to as being attached or enclosed) is being deposited with the United States Postal Service via Express Mail Label No. EL561050684US in an envelope addressed to: BOX PATENT APPLICATION, Assistant Commissioner for Patents, Washington, D.C. 20231, on July 14, 2000.

By: Mary Donna Berkley  
Mary Donna Berkley

Respectfully submitted,

By: \_\_\_\_\_

Christopher R. Maiorana

Reg. No. 42,829

CHRISTOPHER P. MAIORANA, P.C.

24025 Greater Mack, Suite 200

St. Clair Shores, Michigan 48080

(810) 498-0670

**Date:** July 14, 2000

**Attorney Docket No.:** 0325.00371

004720 9969T960

**HYBRID DATA TRANSPORT SCHEME OVER OPTICAL NETWORKS**

**Cross Reference to Related Applications**

This application claims the benefit of U.S. Provisional  
5 Application No. 60/184,264, filed February 23, 2000, which is  
hereby incorporated by reference in its entirety.

The present application may relate to U.S. Serial No.  
09/523,576, filed March 10, 2000, U.S. Serial No. 09/523,476, filed  
March 10, 2000, U.S. Serial No. 09/535,717, filed March 27, 2000,  
10 U.S. Serial No. 09/535,889, filed March 27, 2000 and U.S. Serial  
No. 09/535,890, filed March 27, 2000, which are hereby incorporated  
by reference in their entirety.

**Field of the Invention**

15 The present invention relates to a method and/or  
architecture for data transport generally and, more particularly,  
to a method and/or architecture for hybrid data transport over  
optical networks.

**Background of the Invention**

Conventional SONET/SDH networks are designed to efficiently carry transporting plesiochronous digital hierarchy (PDH) channels (T1/T3 channels). In order to support PDH data, the SONET/SDH frames typically have a payload that is divided into fixed timeslots called virtual tributaries (VT). In keeping with timing of the smallest of telephony components DS0 (64Kbps), the SONET/SDH frames are of fixed length repeated at an interval of 125 $\mu$ S.

At the rate of 125 $\mu$ S, each byte of the SONET/SDH frame represents a basic telephony channel of DS0. The SONET/SDH frames reserve bytes to form higher-order the plesiochronous digital hierarchy (PDH) channels. For example, a T1 channel comprises 28 DS0 channels. However, growth of Internet traffic and VoIP applications requires more data traffic such as internet protocol (IP) in addition to standard PDH channels. The IP traffic is being carried on the SONET/SDH network in addition to conventional T1/T3 channels.

However, the SONET/SDH frame payload areas can only transport one type of data. A path signal label (PSL) value in path overhead (POH) bytes of the SONET/SDH frame typically

0325.00371  
CD00064

identifies the type of data contained in the payload area. Transporting different data types on a single optical fiber requires complex mapping mechanisms.

Referring to FIG. 1, a conventional approach for transmitting data packets on fixed bandwidth virtual tributaries (VTs) 10 is shown. The conventional approach 10 comprises a number of SONET/SDH frames 12a-12n. Each of the SONET/SDH frames comprises a number of VTs 14a-14n. The virtual tributaries 14a-14n comprise a SONET/SDH synchronous payload envelope (SPE). Each of the SPEs can dedicate a portion of bandwidth (a number of the VTs 14a-14n) to store a particular data type. The unused bandwidth (the remaining VTs 14a-14n) can be used to transport asynchronous transfer mode (ATM) or internet protocol (IP) data traffic. However, due to the bursty nature of the ATM and IP data traffic, allocating a fixed bandwidth (a number of virtual tributaries 14a-14n) for the data traffic results in highly inefficient usage of available SONET/SDH bandwidth. For purely data-oriented high bandwidth applications, the entire SONET/SDH payload (the VTs 14a-14n) is commonly used for transporting data bytes (ATM or IP packets).

Each frame 12a-12n comprises a path over-head (POH) 16. The path over-head 16 comprises an unique path signal label (PSL) value 18 that identifies the type of data being carried inside the SPE area 14a-14n.

5 Referring to FIG. 2, a conventional long-haul multi-service access network 30 is shown. The network 30 comprises a number of rings 32a-32n, a first number of add multiplexers 34a-34n, a first number of drop multiplexers 36a-36n, a second number of add multiplexers 38a-38n and a second number of drop multiplexers 40a-40n. The multiplexers 34, 36, 38 and 40 must generally be capable of processing different data types (as shown in FIG. 3). The optical rings 32a-32n are optical carrier rings. The network 30 implements the optical rings 32a-32n transport IP and T1 data. The conventional network 30 implements a separate ring 32a-32n for each consumer, enterprise and metropolitan area network. The separate SONET/SDH rings 32a-32n are implemented to carry IP data using packet-over-sonet (POS), ATM, and T1 channels.

15 The rings 32b and 32d are local central office (CO) rings. The ring 32c is an interexchange ring. The central office and interexchange rings 32a-32d are time-division multiplexed (TDM). The time slots (virtual tributaries VTs) are dedicated to

0325.00371  
CD00064

the smaller bandwidth rings 32a, 32e, 32f and 32g carrying POS, ATM, or T1/T3 traffic.

A point-to-point cross-connect is established through the time slots, allowing long-haul connectivity across the SONET/SDH network 30. However, provisioning long-haul transfer of data is a time consuming process and requires coordination across many links. For example, in order to transfer POS traffic from the ring A (32a) to the ring F (32f), the POS traffic has to travel through one or more time slots of the ring B (32b), then through similar channels at the ring C (32c), through the ring (32e) E and then to the ring F (32f).

Referring to FIG. 3, various types of conventional SONET/SDH add/drop devices 50a-50n are shown. The SONET/SDH add/drop devices 50a-50n are required at each node (ring 32a-32n) on the optical network 30. The add/drop devices 50a-50n are required to add and drop traffic to and from the network 30. The SONET/SDH add/drop devices 50a-50n illustrate different types of SONET/SDH add/drop multiplexers (ADM). The ADMs 50a-50n are attached to the SONET/SDH rings 32a-32n carrying data traffic (similar to the devices 34, 36, 38 and 40 of FIG. 2).

The device 50a is a terminal multiplexer. The device 50b is a SONET/SDH ADM. The SONET/SDH add/drop devices 50a and 50b are designed to add/drop telephony and PDH fixed bandwidth channels such as NxDS0 (64kbps, carrying a telephony channel) and T1/T3 channels. The device 50c is a data-aware SONET/SDH ADM. The data-aware SONET/SDH ADM 50c is configured to add/drop IP and ATM packet data to and from the SONET/SDH rings 32a-32n. The device 50n is a digital cross-connect (DCC). The digital cross-connect (DCC) 50n connects different SONET/SDH rings or perform add/drop operations on DS3 (45Mbps) channels.

The conventional network 30 requires multiple data type SONET/SDH rings and add/drop devices. The SONET/SDH network 30 requires many different fiber rings and different types of add/drop devices for creating a medium-to-long haul optical network. The multiple SONET/SDH rings and add/drop devices increase cost. Additionally, complexity and cost of the SONET/SDH ADMs prohibit wide-area deployment for transportation of voice, data, and video traffic for long-haul networks.



**Summary of the Invention**

The present invention concerns an apparatus comprising one or more nodes. The apparatus may be configured to transport one or more packets within a frame. The one or more nodes may be  
5 configured to add and/or drop at least one of the one or more packet from the frame.

The objects, features and advantages of the present invention include providing a method and/or architecture for hybrid data transport that may (i) allow an add/drop multiplexer (ADM) and/or a router connected to a network to drop any type of protocol packet (such as ATM, IP, PPP, PDH (e.g., T1/T3), or raw byte stream) from a payload area at any optical node, (ii) provide an ADM and/or a router connected to a network that may add any protocol packet (such as ATM, IP, PPP, PDH (e.g., T1/T3), or raw  
15 byte stream) to the payload area at any optical node, either (a) as a new addition or (b) in place of a dropped packet, (iii) optimize available bandwidth of a network to deliver a maximum number of services and protocols and/or (iv) provide significant savings in equipment and fiber optics infrastructure.

**Brief Description of the Drawings**

These and other objects, features and advantages of the present invention will be apparent from the following detailed description and the appended claims and drawings in which:

5           FIG. 1 is a detailed timing diagram of conventional frame for fiber optic data transmission;

FIG. 2 is a block diagram of a conventional multi-service optical network;

10           FIG. 3 is a block diagram of various conventional SONET/SDH add/drop multiplexers;

FIG. 4 is a block diagram of a preferred embodiment of the present invention;

FIG. 5 is a block diagram illustrating an implementation of the present invention;

15           FIG. 6 is a detailed block diagram of a protocol independent frame;

FIG. 7 is a detailed block diagram of a payload of FIG. 6;

FIG. 8 is a detailed block diagram of a packet of FIG. 7;

20           FIG. 9 is a detailed block diagram of a packet header of FIG. 8;

FIG. 10 is a flow chart illustrating an operation of the present invention;

FIG. 11 is a flow chart illustrating an operation of the present invention; and

5 FIG. 12 is a flow chart illustrating an operation of the present invention.

#### Detailed Description of the Preferred Embodiments

Referring to FIG. 4, a block diagram of system 100 is shown in accordance with a preferred embodiment of the present invention. The system 100 may allow a single device to add and/or drop one or more types of data traffic from a single fiber optic line. The system 100 may provide an add/drop multiplexer (ADM) that may allow the use of a single device for a variety of data types. In one example, the system 100 may be implemented as a SONET/SDH network implementing SONET/SDH ADMs. The system 100 may require a single fiber optic line and a single type of SONET/SDH ADM to carry a number of different data traffic types. The system 100 may result in significant savings for network carriers. Additionally, the system 100 may allow for provisioning services over short or long haul optical networks.

004740" 9559T980

5 The structure of the network 100 may comprise a number of rings 102a-102n and a number of add/drop multiplexers (ADMs) 104a-104n. The ADMs 104a-104n may be implemented to communicate with the rings 102a-102n. Each of the rings 102a-102n may be implemented as an optical carrier ring. Each of the ADMs 104a-104n may be configured to add/drop data (e.g., PDH data or IP data) to/from the network 100. In one example, each of the ADMs 104a-104n may be implemented as a SONET/SDH ADM. The network 100 may allow existing fiber optic lines to be utilized at full capacity. The system 100 may not require installation of additional fiber links (e.g., ADMs) for different types of data traffic. The system 100 may allow conventional SONET/SDH ADMs to be implemented to add/drop data. The system 100 may not require additional SONET/SDH ADMs. Therefore, the system 100 may allow for significant cost savings in network infrastructure.

15

20 In one example, the system 100 may be implemented as a long-haul multi-service network. In another example, the rings 102a, 102b, 102c, 102d and 102n may be implemented as a customer premise equipment (CPE) ring, a local central office ring, an interexchange ring, a local central office ring and a CPE ring, respectively. However, the rings 102a-102n may each be implemented

0325.00371  
CD00064

as another appropriate network component in order to meet the criteria of a particular implementation. Additionally, each of the rings 102a-102n may be implemented to provide unified data transport.

5           The system 100 may provide a simplified multi-service SONET/SDH network. The system 100 may provide unified data transport over a fiber optic line. The unified data transport may allow transportation of one or more different types of data over a single fiber optic line within a single SONET/SDH payload. The unified data transport may be provided by a data transport protocol. The data transport protocol may be implemented, in one example, as a hybrid data transport (HDT). The HDT protocol may provide a common data header for all data types. The HDT protocol may create a frame having space for storing different types of data (to be discussed in connection with FIGS. 6, 7, 8 and 9). Additionally, the frame may be flexible in length in order to accommodate for different types and lengths of packet data.

Referring to FIG. 5, a block diagram of an unified SONET/SDH network 120 is shown. The network 120 may support the hybrid data transport (HDT) protocol. The network 120 may comprise a ring 122 and a number of nodes 124a-124n. The nodes 124a-124n

0325.00371  
CD00064

may communicate with the ring 122. In one example, the ring may be implemented as a single fiber optical line. Each of the nodes 124a-124n may receive ATM cells, packet-over-SONET/SDH (POS), and PDH (e.g., T1/T3) types of data via the ring 122. The nodes 124a-  
5 124n may be similar to the nodes 104a-104n.

Referring to FIG. 6, a detailed block diagram of a protocol independent frame 200 is shown. In one example, the frame 200 may be implemented as a SONET/SDH frame. The frame 200 may illustrate mapping of different data types in a SONET/SDH SPE envelope. The frame 200 may have an embedded frame header (and/or footer) 202 (e.g., a 32-bit frame header) to create a deterministic packet transport protocol. Additionally, the synchronous payload envelope SPE of frame 200 may comprise a number of 32-bit payload headers 204a-204n that may precede each packet of the envelope.  
10 The payload headers 204a-204n may proceed the packets regardless of a particular packet data type stored within the SPE. The frame 200 may achieve bandwidth maximization. The frame header 202 may comprise a SONET/SDH path over-head (POH) 206. The SONET/SDH POH may comprise a single path signal label (PSL) value 208. The PSL  
15 value 208 may provide specific information regarding the various types of packets embedded within the payload of a particular frame.  
20

0325.00371  
CD00064

The PSL 208 may be implemented as a few header bits configured to denote the particular type of packet (e.g., ATM, IP, PPP, Frame Relay, etc.) embedded within the payload portion of the frame 200.

Referring to FIG. 7, a detailed block diagram of the SONET/SDH synchronous payload envelope (SPE) of the frame 200 is shown. The SONET/SDH SPE may comprise a number of packets 220a-220n and a number of empty packets 222a-222n. The packet payload header 204a of the packet 220a may identify the packet/protocol. The packet payload header 204a may identify a packet type of the packet 220a stored (or transported). The payload header 204a may tell what kind of packet/protocol (such as Ethernet, PPP, IP, Frame Relay, ATM cells, T1, etc.) is inside a payload of the packet 220a. Different protocols may be supported at two ends (e.g., the devices 104a-104n) of a network without the need for provisioning in advance. In contrast, conventional approaches use a protocol over WAN, which is usually negotiated between two parties at the end devices 104a-104n of the WAN link.

The payload header 204a may be used to tell whether one or more of the empty packets 222a-222n inside the SONET/SDH SPE that may be reused at an intermediate node. In contrast, in conventional SONET/SDH networks the entire SONET/SDH frame 200

0325.00371  
CD00064

travels around the ring until removed by the sender. With the system 100, a receiver may mark a portion of the SONET/SDH SPE of the frame 200 as reusable. A particular node on the fiber network 100 may mark different sections of the SONET/SDH SPE as reusable by the same or remaining nodes 104a-104n.

Provisioning of TDM channels may provide the ability to mark a portion (or many portions) of a SONET/SDH SPE payload area as reusable/non-reusable. With a non-reusable area, even when a receiver receives the packet, another receiver cannot reuse the packet area. However, the same receiver may reuse the reusable area.

In general, there is no limit to the order and manner of packet positioning. Any packet may be marked in any fashion to support, for example, a dynamic mix of data and voice (TDM) traffic on a SONET/SDH network. Such an implementation is not possible with current technologies. The present invention may solve the problem of mixed value and data transmissions faced by telephone carriers and data providers.

As SONET/SDH frames containing fixed bandwidth channels move around the ring, (i) intermediate nodes may detect reusable packets (e.g., the reusability bit is reset), (ii) note offsets of



0325.00371  
CD00064

the reusable packets, and (iii) preserve the respective offsets when recreating the frame (e.g., after adding packets from local input ports) for outbound traffic.

Referring to FIG. 8, a detailed example of a packet is shown. An SDL framing 262 may be in the first 16 bits and may contain the length of the entire payload, including SDL framing bytes. A 16-bits of CRC-16 264 may be provided on the length field (e.g.,  $x_{16} + x_{12} + x_5 + 1$ ). The payload header 204a-204n may be a 32-bit word, followed optionally by an OAM bytes or MPLS labels 268. MPLS/OAM bytes may be variable number of MPLS labels or OAM values that may be transmitted in the header area of HDT, outside of payload. A next fragment offset 270 may be a 16-bit value showing the location offset of next packet fragment (if any) of the packet. The next fragment offset 270 is generally taken from the start of current packet. A header CRC 272 may be computed over payload header bytes only, with same scrambling polynomial used for SDL framing. A payload area 274 may contain the actual packet to be transmitted over the WDM or SONET/SDH link. The payload area 274 may contain one of a number of types of protocol packets, such as Ethernet, ATM, GR.702, PPP, Frame Relay, etc. A payload CRC 276 may be user-controlled value and may be computed for the payload

0325.00371  
CD00064

bytes only. The payload CRC 276 is generally either a 16 or 32-bit value, depending on mutual negotiation between sending and receiving stations.

Referring to FIG. 9, various parameters of the packet header 204a are shown. The particular bit width of the payload header 204a may be varied accordingly to meet the design criteria of a particular implementation. A packet identifier 280 (e.g., D3: D0) generally identifies the type of packet in the payload. For example, value of 0000 may represent a null packet. A null packet may indicate that the payload area may be reused. When a packet is dropped at a node, the length field does not generally need to be modified for the packet, only the D3: D0 bits need to be cleared.

A header data area 282 may carry MPLS labels (e.g., outside of payload area). Operation administration and maintenance (OAM) bytes 282 may be used for link management, or any other data separately from the payload. A reusability area 284 (e.g., D7) may be a "1". If a SONET/SDH node can reuse a particular packet area, the packet length field 264 of the SDL header may give the size of the packet area. If the bit D7 may be set to a "0", then a node will not generally mark the packet area as re-usable, even after a packet has been dropped. The particular nodes of the various

0325.00371  
CD00064

configuration bits may be varied (e.g., inverted) accordingly to meet the design criteria of a particular implementation.

A header length area 286 (e.g., D15: D8) may include, in one example, a 32-bit payload header. A fragment identifier area 288 (e.g., D17: D16) may be implemented as a two word value. Allowing packets to be at a fix location within the payload area and dropping/adding packets at intermediate nodes may require some packets to be fragmented to fill empty spaces left by previously dropped packets. When a packet is fragmented, sections (e.g., fragments) of the packet may be stored in available spaces. The fragments are linked by specifying a next-fragment location (offset) in the preceding fragment. A value of "00" in the first packet (fragment) may indicate that the payload area contains a complete packet. A value of "01" may indicate the beginning packet of a fragmentation sequence. A value of "10" may indicate a continuation of packets. A value of "11" may mark the last fragment in the series. Other particular bit patterns may be implemented accordingly to meet the design criteria of a particular implementation.

A padding area 290 (e.g., D18: D19) may indicate a minimum packet length. In one example, the minimum packet length

0325.00371  
CD00064

may be 4 bytes (e.g., 2 bytes length + 2 bytes CRC). Idle bytes at the end of packets and elsewhere may be marked by a length field of "0000". In instances there may be less than 4 bytes left between packets. However, another appropriate number and/or configuration of bytes may be implemented in order to meet the criteria of a particular implementation. Additionally, the header structure may mandate the appropriate number of bytes. In this case, it may be impossible to place a SDL null packet. Such idle bytes are shown as tail-end padding for the preceding packet. An unused area 292 (e.g., D31:20) may be used for additional expansion.

Devices supporting the hybrid data transport (HDT) protocol may operate similarly to normal SONET/SDH transport. Additionally, processing operations for ATM cells, POS, and PDH data may be similar. For example, the nodes 104a-104n may operate similar to normal SONET/SDH nodes. Additionally, the HDT protocol may add a header to each frame 200 and add a payload header to each packet within a payload area of the SONET/SDH frame 200. The payload headers may allow the packets to mix within the payload area of the frame 200. Operation of the HDT protocol is generally related to processing of the headers. The processing of the

0325.00371  
CD00064

headers may identify a type of data packet within the SONET/SDH payload. The packet may be one of a plurality of packet types.

Recall that support of PDH-type (T1/T3) channel may require a fixed starting location for the channel in every frame.

5 If PDH support is not required (e.g., no fixed bandwidth channels), packets of any data type may be placed anywhere within the envelope. The placement of the packets of various data types within the SPE may allow the system 100 to achieve excellent bandwidth utilization. Additionally, the system 100 may have a  
10 reduced operational complexity. If PDH support is required (e.g., fixed bandwidth channels), the fixed bandwidth channels may be required to be static in their locations for each consecutive SONET/SDH frame. In this case, any additionally added data packets (e.g., ATM or IP) may need to be fragmented to fit the empty spaces  
15 left by dropped packets.

However, fragmentation of a packet may be easily accomplished with the system 100. The network 100 sequentially transmit bytes in the payload area of the frame 200. Since packet bytes are always sent in sequence on a particular optical link, a  
20 plain offset for the next fragment starting location may link

0325.00371  
CD00064

packet fragments. The system 100 may efficiently recover the sequenced fragments.

Referring to FIG. 10, an example of a receive operation 300 is shown. A node may receive a frame (e.g., the nodes 104a-104n). A block 302 may determine if the received frame is an HDT frame. The block 302 may use a PSL value in the POH to determine the type of protocol carried inside the SPE. If the PSL shows POS, ATM, or PDH traffic, the receive operation may proceed to the block 304. If no HDT packets are present, a block 306 may process the POS/ATM/PDH packet. If in the block 302, the PSL shows the SPE contains HDT frames, the node may implement additional logic for HDT processing. The HDT logic may detect and route different types of packets embedded in the SONET/SDH SPE.

A block 308 may read the POH. A block 310 may determine a first packet of the SONET/SDH SPE. A block 312 may read a length and CRC of the first packet. A block 314 may determine a match of the length and the CRC. If a non-match of the length and CRC occurs, the receive operation is generally continues to a block 316. The block 316 may read a next word of the packet. If a match occurs, the receive operation may process the packet. Once the payload header has been processed and different packet types are

0325.00371  
CD00064

identified, hardware (e.g., implemented in the system 100) may use header fields to retrieve the payload and implement hardware blocks for processing.

In traditional ATM transport over SONET/SDH, looking at the PSL value generally retrieves ATM cells. The PSL may determine if ATM cells are present and may then reach the SONET/SDH SPE to retrieve the fixed byte ATM cells, either with or without HEC-based cell delineation.

In HDT transport protocol, if the payload header in the HDT shows that the payload contains ATM cells, the hardware device may retrieve the appropriate payload bytes (up to number of bytes specified in length field) and sends the byte stream to an existing ATM cell processing block. The ATM cell processing block may then work on the byte stream using HEC hunting just as if the SPE contained only ATM cells in the payload area.

The ADMs may be implemented to provide the receive operation 300. The receive operation 300 may illustrate a drop operation of the SONET/SDH ADMs 104a-104n. Each node on a network may receive a SONET/SDH frame. The nodes may use the PSL value in the POH to determine a type of protocol carried inside the SONET/SDH SPE. If the PSL shows POS, or ATM, or PDH traffic, the

0325.00371  
CD00064

nodes may receive the packet normally. If the PSL shows the SONET/SDH frame contains SONET/SDH HDT frames, the nodes may implement additional logic for HDT processing. The additional HDT processing may detect and route different types of packets embedded in the SONET/SDH SPE. Generally, once the payload header has been processed and different packet types are identified, the hardware may use header fields to retrieve the payload and implement normal processing techniques.

Referring to FIG. 11, an example of a processing operation 350 is shown. The processing operation 350 may illustrate packet processing using the HDT protocol. The processing operation 350 may include dropping a packet of data from an envelope and returning the frame back to the network 100. Additionally, the processing operation 350 may reroute remaining data of the SONET/SDH frame for onward transmission to downstream nodes.

A device supporting the hybrid data transport (HDT) protocol generally operates much the same as a normal SONET/SDH device would operate. Operations for processing ATM cells, POS, and PDH protocols may be similar. The HDT protocol generally adds a header to each frame and a payload header to each packet to allow



0325.00371  
CD00064

mixing within the same SPE. Much of the HDT processing is generally related to processing of the headers in order to identify the type of packet. Once a type of packet is identified, starting address of data bytes may be passed to standard logic blocks (e.g.,  
5 ATM, PDH, POS, SRP and Ethernet processing blocks) for processing an individual packet type.

As the frame is received initial bytes may be placed in a small transit buffer. If the packet does not belong to the receiving node, the bytes are generally streamed out of transit  
10 buffer to an output port. However, if the packet belongs to the node processing may continue.

A block 352 may read a payload length and payload header of an incoming packet. If a bandwidth allocate bit (e.g., BA - bit D7) is asserted "1" in the payload header (PH), the packet area may  
15 be reserved for fixed bandwidth channels such as PDH. To provide fixed bandwidth the node may place an outgoing packet at a same offset of the payload SPE when transmitting.

A block 354 may determine a reusability of the packet. If the bandwidth bit D7 is "0", the node may clear the packet  
20 identifier bits D3: D0 to mark the packet as void or reusable. A reusable packet may proceed to the block 356. If the packet area

0325.00371  
CD00064

is reserved, the packet identifier bits (e.g., D3: D0) may not be cleared. If the bytes of the packet belong to the receiving node, the packet may be sent to the system via the processing operation 350. A particular number of bytes to be sent to the system is generally specified in the length field of the SDL header. If the header shows fragmentation, then the packet is generally received and assembled before being sent to system.

Referring to FIG. 12, an example of a transmit operation 400 is shown. Transmission involves addition of new data from system or retransmission of circulating data from upstream nodes to downstream nodes. A device supporting HDT may receive a packet to be transmitted from a system side. In the transmit operation 400, a node may take inputs from different sources 402, encapsulate the packets with an SDL length/CRC fields 404, add an HDT header 406 to each of the packets, and then store the packets inside the SPE.

The node may not send a fresh frame on the network in order to transmit the packets. A TDM channel check 408 may determine a reusability of the SPE. The transmit operation 400 may reuse available space in an incoming SONET/SDH frame (containing HDT frames). The transmit operation 400 may then may proceed to a length check 410 to see if there is any space available in the SPE

0325.00371  
CD00064

to insert the packet to be sent. If there is enough space, the entire packet is stored (with proper SDL framing and HDT header bytes). Any remaining bytes, depending on the size, are generally either (i) filled with a null HDT packet (e.g., the payload header identification bits are 0000), (ii) filled with SDL null packets (e.g., pairs of length/CRC with a null length field), or (iii) accounted for as tail-end padding (e.g., if the size is less than 4 bytes).

If the transmit operation 400 runs into a fixed-bandwidth channel allocation midway through the packet allocation, the packet is generally fragmented. In this case, a portion of the packet may be stored at one place and other fragments may be stored at another free location. The first fragment offset pointer may contain the starting location of second fragment. Since bytes are transmitted sequentially in the frame 200, reassembling fragments may be easily achieved.

If a particular node detects an incoming SONET/SDH frame on a receive port, or if there is a frame in the transmit/receive queue, the node may check the SONET/SDH frame 200 to see if there are unused/reusable areas in the incoming/queued frame that can be used for sending data. If there is enough space available in the

0325.00371  
CD00064

frame, the node may fill the space with additional data before sending the frame.

In HDT, PDH channels of any bandwidth (up to allowable SONET bandwidth limits) may be provisioned anywhere inside the SONET/SDH SPE. To achieve precise timing, PDH bytes must begin at the same offset inside the SONET/SDH SPE. However, allocation of PDH channels at different locations inside a SONET/SDH SPE may create fragments of unused bytes all over the SONET/SDH SPE. For efficient transport of variable-size IP packets, these unused bytes may be utilized for IP data.

The transmit (e.g., add) operation 400 may receive inputs from different sources. The operation 400 may (i) add an HDT header to each outgoing packets, (ii) encapsulate the packets with SDL length/CRC fields and (iii) place the packets within a SPE of a SONET/SDH frame. The SONET/SDH node may not be required to send a fresh frame on the network. The SONET/SDH node may be configured to reuse available space in an incoming HDT protocol frame.

For example, a device (e.g., ADM or router) supporting HDT may receive a packet from a system side that may transmit. The device may then look in an output packet buffer to determine if there is any space available where the packet may be inserted. If

0325.00371  
CD00064

there is enough space, the entire packet may be stored (with proper SDL framing and HDT header bytes). Any remaining bytes, depending on the size may be either filled with a null HDT packet (the payload header identification bits are 0000), filled with SDL null packets (pairs of length/CRC with a null length field) or (if the size is less than 4 bytes) accounted for as tail-end padding.

If the device encounters a fixed-bandwidth channel allocation midway through packet allocation, the device may fragment the packet. A portion of the packet may be stored at one location, while other fragments may be stored at another free location. The first fragment may have an offset pointer that may contain a starting location of the second fragment. Since, data bytes may be transmitted sequentially in a SPE, reassembling the fragments may not be difficult.

The packets may be added either using a fresh SONET/SDH SPE or by reusing bytes inside an incoming or a previously created/queued frame. The decision of which packet to add to a void or reusable packet area inside an SPE may be determined by one or more of the following rules:

(i) pick a type of packet that may be specified by the user for an add operation at the node;

0325.00371  
CD00064

(ii) pick a packet (or a collection of packets) that may fit inside the reusable area;

(iii) of all packets that may fit inside the reusable space, pick one based on QoS parameters or packet priority. Since

5 SONET/SDH frames repeat at 125μS an interval, frequency of packet transmission within the SPE may be adjusted to achieve desired transfer rates easily;

(iv) for the packet, if bandwidth is generally to be reserved, program the bandwidth allocation bit (bit D7) so all downstream nodes may set a fixed bandwidth for the packet;

(v) set the payload identifier bits (D3: D0) to indicate a type of packet. If any MPLS labels may be added, add them before the packet and mark the length value in the payload header;

(vi) create a SDL length/CRC construct, prepare a complete packet and add the packet to the payload area; and

(vii) if the node detects an incoming SONET/SDH frame on the receive port, or if there is a frame in the transmit/receive queue, the node may check the frame to see if there are unused/reusable areas in the incoming/queued frame that may be used

0325.00371  
CD00064

for sending data. If there is enough space available in the frame, the node may fill the space with data.

5 The system 100 may allow a SONET/SDH add/drop multiplexer (ADM) or a router connected to SONET/SDH ring to drop any type of protocol packet (such as ATM, IP, PPP, PDH such as T1/T3, or a raw byte stream) at any optical node. The system 100 may allow a SONET/SDH ADM or a router connected to SONET/SDH ring to add any protocol packet (such as ATM, IP, PPP, PDH such as T1/T3, or a raw byte stream) to a SONET/SDH payload area at any optical node. The packet may be added either as (i) a new addition or (ii) in place of a dropped packet.

10 The system 100 may allow a user to optimize available bandwidth of the SONET/SDH network to deliver maximum number of services and protocols using same single fiber. The system 100 may provide significant savings in equipment and fiber optics infrastructure.

15 While the invention has been particularly shown and described with reference to the preferred embodiments thereof, it will be understood by those skilled in the art that various changes

0325.00371  
CD00064

in form and details may be made without departing from the spirit  
and scope of the invention.



**CLAIMS**

1. An apparatus configured to transport one or more packets within a frame, comprising one or more nodes configured to add and/or drop at least one of said one or more packets from said frame.

2. The apparatus according to claim 1, wherein said one or more nodes comprise add/drop multiplexers (ADMs).

3. The apparatus according to claim 1, wherein said one or more nodes comprises SONET/SDH add/drop multiplexers (ADMs).

4. The apparatus according to claim 1, wherein said frame is further configured to optimize a bandwidth of said apparatus.

5. The apparatus according to claim 1, wherein said apparatus comprises a fiber optic network.

0325.00371  
CD00064

6. The apparatus according to claim 1, wherein said apparatus comprises a SONET/SDH fiber optic network.

7. The apparatus according to claim 1, wherein said packet further comprise a header configured to identify a data type of said one or more packets.

8. The apparatus according to claim 1, wherein said header comprises frame specific information.

9. The apparatus according to claim 1, wherein said one or more packets are selected from a group consisting of IP packets, Packet-Over-SONET/SDH (POS), PPP packets, ATM cells, G.702-based PDH (T1/T3) packets, Frame Relay packets, and any other byte stream.

10. The apparatus according to claim 1, wherein said apparatus comprises a media selected from the group consisting of

0325.00371  
CD00064

ring and point-to-point networks and non-SONET/SDH configurations such as point-to-point WDM networks.

11. The apparatus according to claim 1, wherein each of said nodes is further configured to determine a reusability of each of said one or more packets.

12. The apparatus according to claim 11, wherein each of said nodes is further configured to determine a reusability of each of said one or more packets in response to a reuse bit.

13. The apparatus according to claim 1, wherein each of said one or more packets comprise a payload header configured to store packet specific information.

14. The apparatus according to claim 1, wherein each of said one or more nodes is selected from the group of (i) terminal multiplexers and (ii) SONET/SDH ADMs and (iii) data-aware SONET/SDH ADMs and (iv) digital cross-connects (DCCs)

0325.00371  
CD00064

15. An apparatus comprising one or more nodes configured to interface a network, wherein each of said one or more nodes is configured to interface one or more data types.

16. A method for transporting one or more packets each comprising at least one of a plurality of data types within a frame, comprising the steps of:

- (A) adding at least one of said one or more packets; and
- (B) dropping at least one of said one or more packets.

17. The method according to claim 16, comprising the step of:

- (C) identifying a data type of said one or more packets.

18. The method according to claim 16, wherein said one or more packet is selected from a group consisting of IP packets, Packet-Over-SONET/SDH (POS), PPP packets, ATM cells, G.702-based PDH (T1/T3) packets, SRP packets, Frame Relay packets, or byte-stream.

0325.00371  
CD00064

19. The method according to claim 17, further comprising the step of:

(D) determining a reusability of each of said one or more packets.

20. The method according to claim 19, wherein step (D) is further configured in response to a reuse bit.

0325.00371  
CD00064

**ABSTRACT OF THE DISCLOSURE**

An apparatus comprising one or more nodes. The apparatus may be configured to transport one or more packets within a frame. The one or more nodes may be configured to add and/or drop at least one of the one or more packet from the frame.

004T20" 355 3T560

107

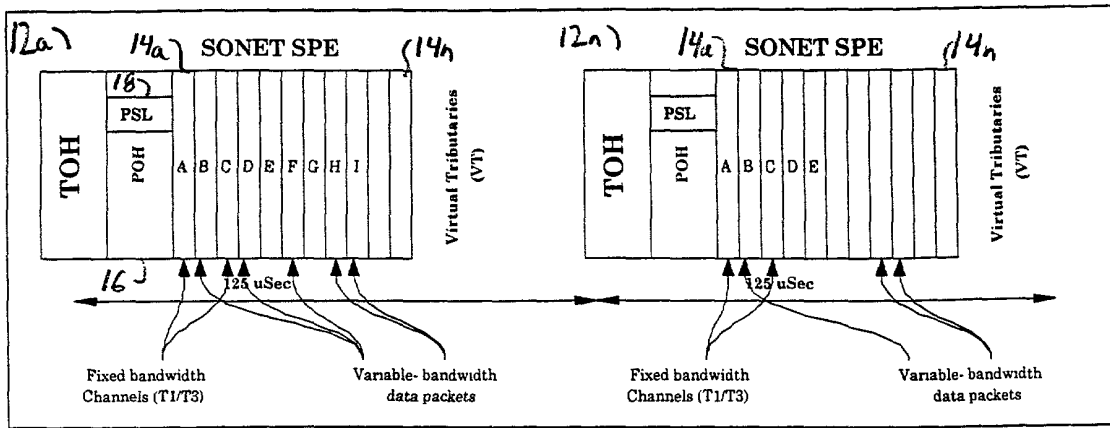


FIG. 1

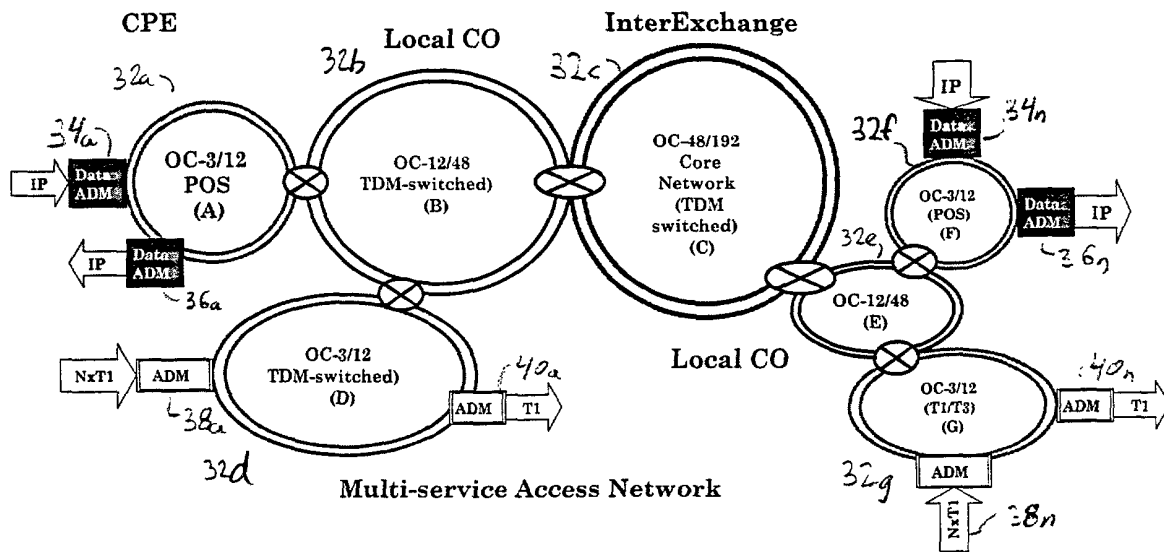


FIG. 2

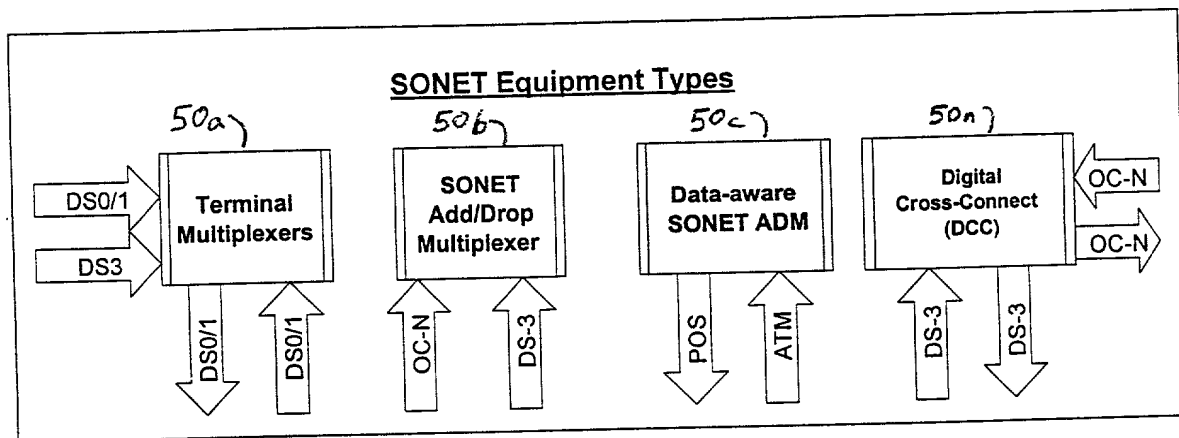


FIG.3



All-Time Best		All-Time Worst	
Year	Score	Year	Score
1998	100	1998	100
1997	95	1997	95
1996	90	1996	90
1995	85	1995	85
1994	80	1994	80
1993	75	1993	75
1992	70	1992	70
1991	65	1991	65
1990	60	1990	60
1989	55	1989	55
1988	50	1988	50
1987	45	1987	45
1986	40	1986	40
1985	35	1985	35
1984	30	1984	30
1983	25	1983	25
1982	20	1982	20
1981	15	1981	15
1980	10	1980	10
1979	5	1979	5
1978	0	1978	0
1977	-5	1977	-5
1976	-10	1976	-10
1975	-15	1975	-15
1974	-20	1974	-20
1973	-25	1973	-25
1972	-30	1972	-30
1971	-35	1971	-35
1970	-40	1970	-40
1969	-45	1969	-45
1968	-50	1968	-50
1967	-55	1967	-55
1966	-60	1966	-60
1965	-65	1965	-65
1964	-70	1964	-70
1963	-75	1963	-75
1962	-80	1962	-80
1961	-85	1961	-85
1960	-90	1960	-90
1959	-95	1959	-95
1958	-100	1958	-100
1957	-105	1957	-105
1956	-110	1956	-110
1955	-115	1955	-115
1954	-120	1954	-120
1953	-125	1953	-125
1952	-130	1952	-130
1951	-135	1951	-135
1950	-140	1950	-140
1949	-145	1949	-145
1948	-150	1948	-150
1947	-155	1947	-155
1946	-160	1946	-160
1945	-165	1945	-165
1944	-170	1944	-170
1943	-175	1943	-175
1942	-180	1942	-180
1941	-185	1941	-185
1940	-190	1940	-190
1939	-195	1939	-195
1938	-200	1938	-200
1937	-205	1937	-205
1936	-210	1936	-210
1935	-215	1935	-215
1934	-220	1934	-220
1933	-225	1933	-225
1932	-230	1932	-230
1931	-235	1931	-235
1930	-240	1930	-240
1929	-245	1929	-245
1928	-250	1928	-250
1927	-255	1927	-255
1926	-260	1926	-260
1925	-265	1925	-265
1924	-270	1924	-270
1923	-275	1923	-275
1922	-280	1922	-280
1921	-285	1921	-285
1920	-290	1920	-290
1919	-295	1919	-295
1918	-300	1918	-300
1917	-305	1917	-305
1916	-310	1916	-310
1915	-315	1915	-315
1914	-320	1914	-320
1913	-325	1913	-325
1912	-330	1912	-330
1911	-335	1911	-335
1910	-340	1910	-340
1909	-345	1909	-345
1908	-350	1908	-350

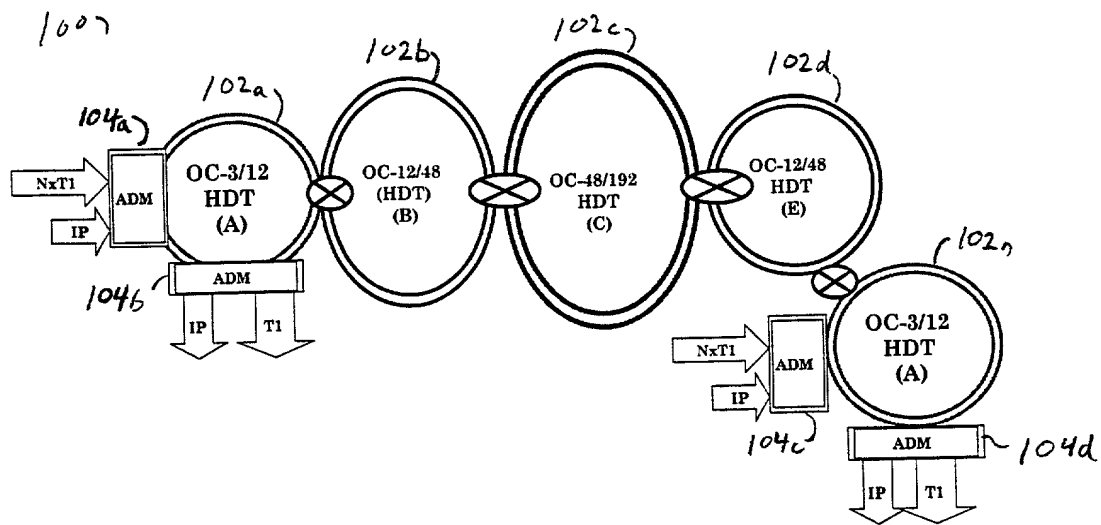


FIG.4

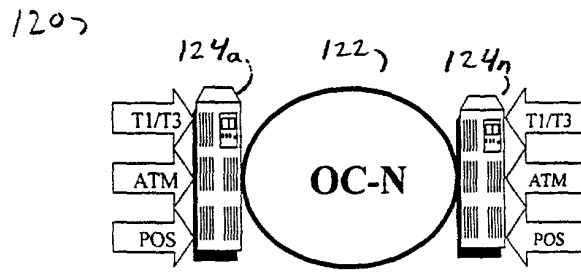


FIG.5

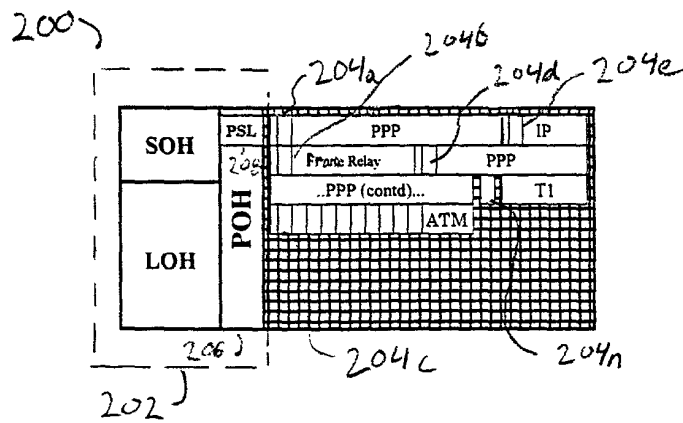


FIG.6

004720 9537960

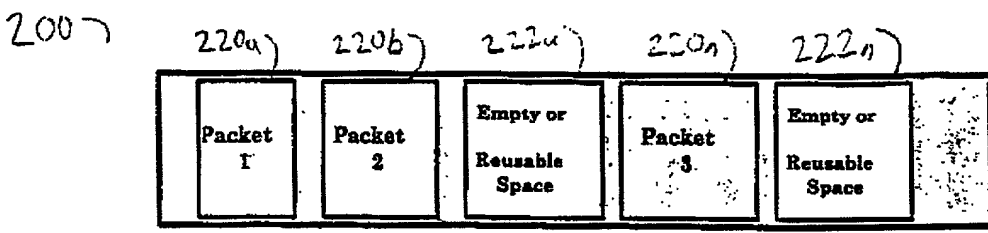


FIG.7

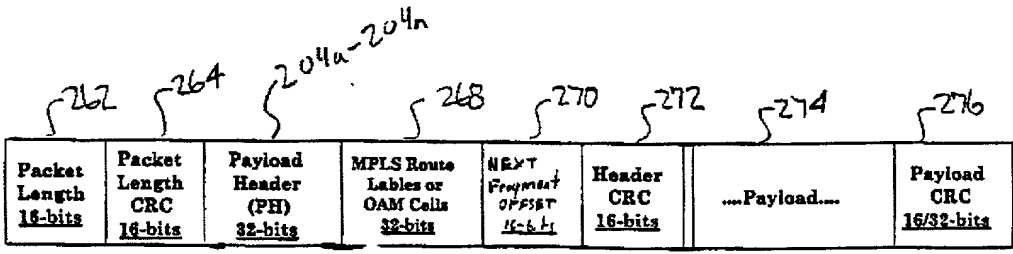


FIG.8

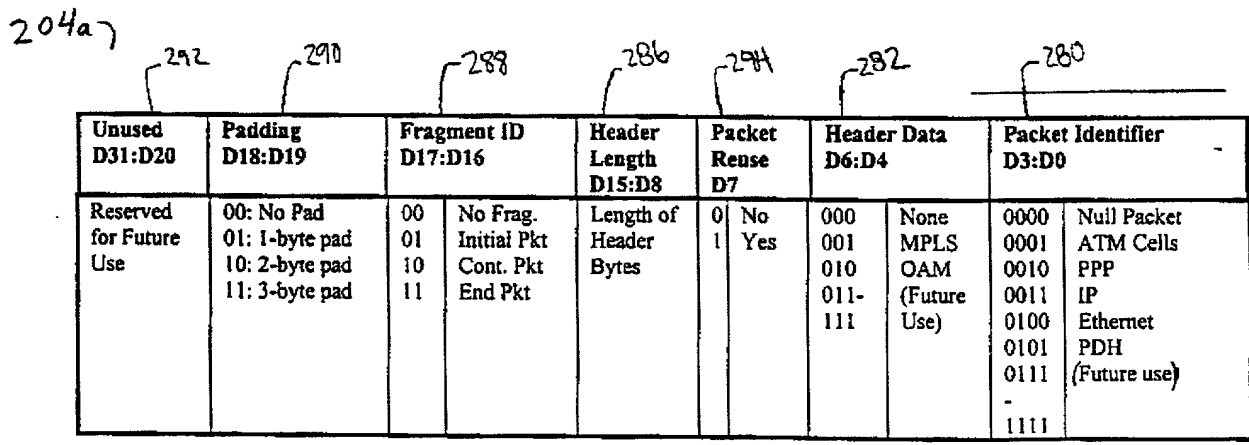


FIG.9

Figure 1 consists of 11 bar charts, labeled (a) through (k), each representing a different demographic or socioeconomic category. The x-axis for all charts represents age groups: 18-24, 25-34, 35-44, 45-54, 55-64, 65-74, and 75+. The y-axis represents the percentage of the total sample. The categories are: (a) Gender, (b) Marital Status, (c) Education, (d) Employment, (e) Income, (f) Housing, (g) Transportation, (h) Health Insurance, (i) Social Security, (j) Retirement, and (k) Disability. Each chart shows the distribution of these categories within each age group. The total sample size for each age group is indicated at the bottom of the chart.

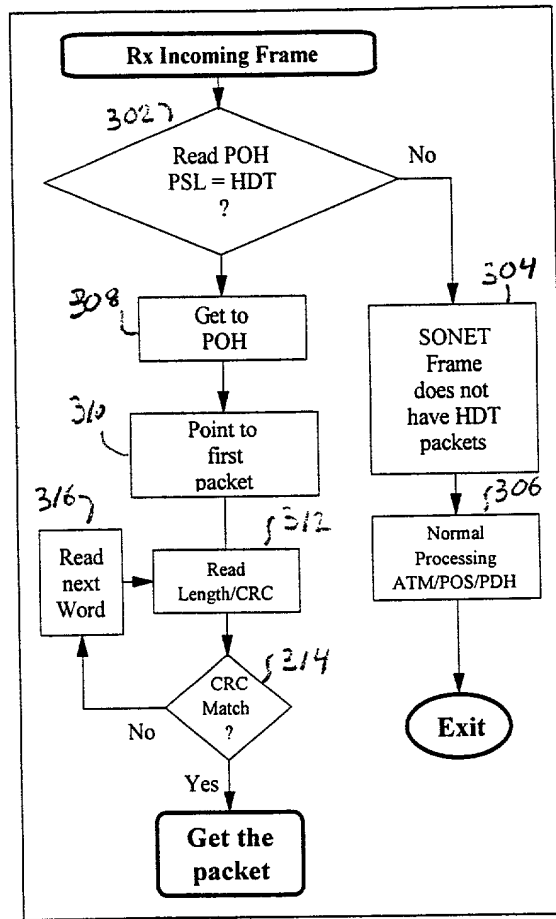


Table 1. Demographic characteristics of the study population	
Age (years)	Mean (SD)
Male	55.2 (10.5)
Female	56.8 (11.2)
Marital status	
Married	78.5%
Single	21.5%
Education level	
High school or above	65.2%
Below high school	34.8%
Occupation	
Professional	12.3%
Managerial	18.7%
Technical	25.4%
Service	32.1%
Unemployed	11.5%
Income (USD/month)	
< 1000	15.2%
1000-2000	28.7%
2000-3000	35.1%
> 3000	21.0%
Health insurance	
Yes	89.3%
No	10.7%
Smoking status	
Smoker	22.5%
Non-smoker	77.5%
Alcohol consumption	
Regular	8.9%
Occasional	14.3%
Never	76.8%
Comorbidities	
Hypertension	45.2%
Diabetes	18.7%
Cholesterol	32.1%
Obesity	25.4%
Depression	12.3%
Family history of heart disease	
Yes	35.1%
No	64.9%

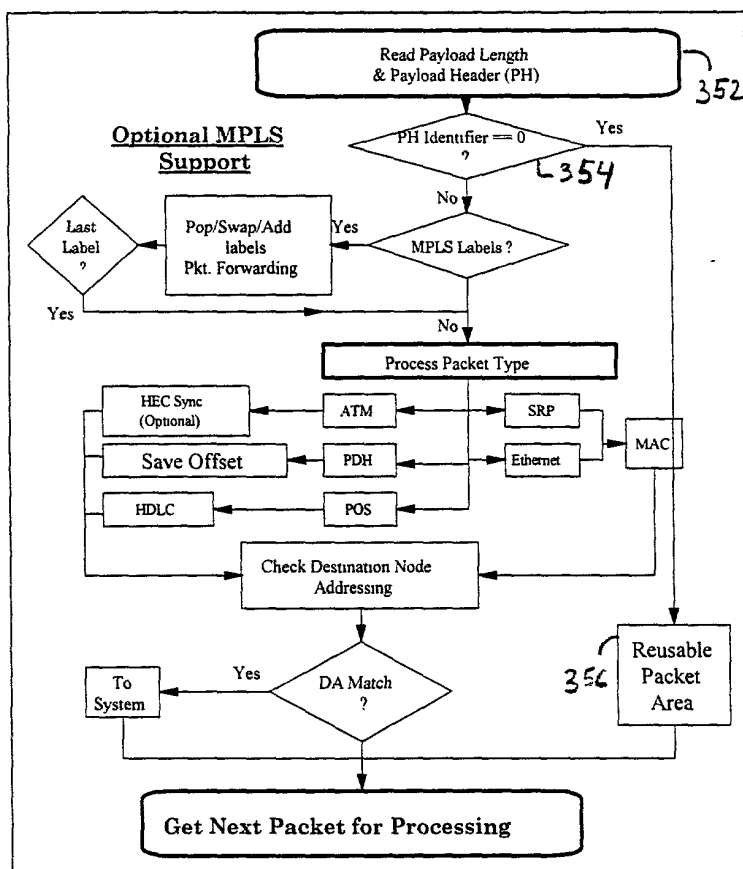


FIG.11

4007

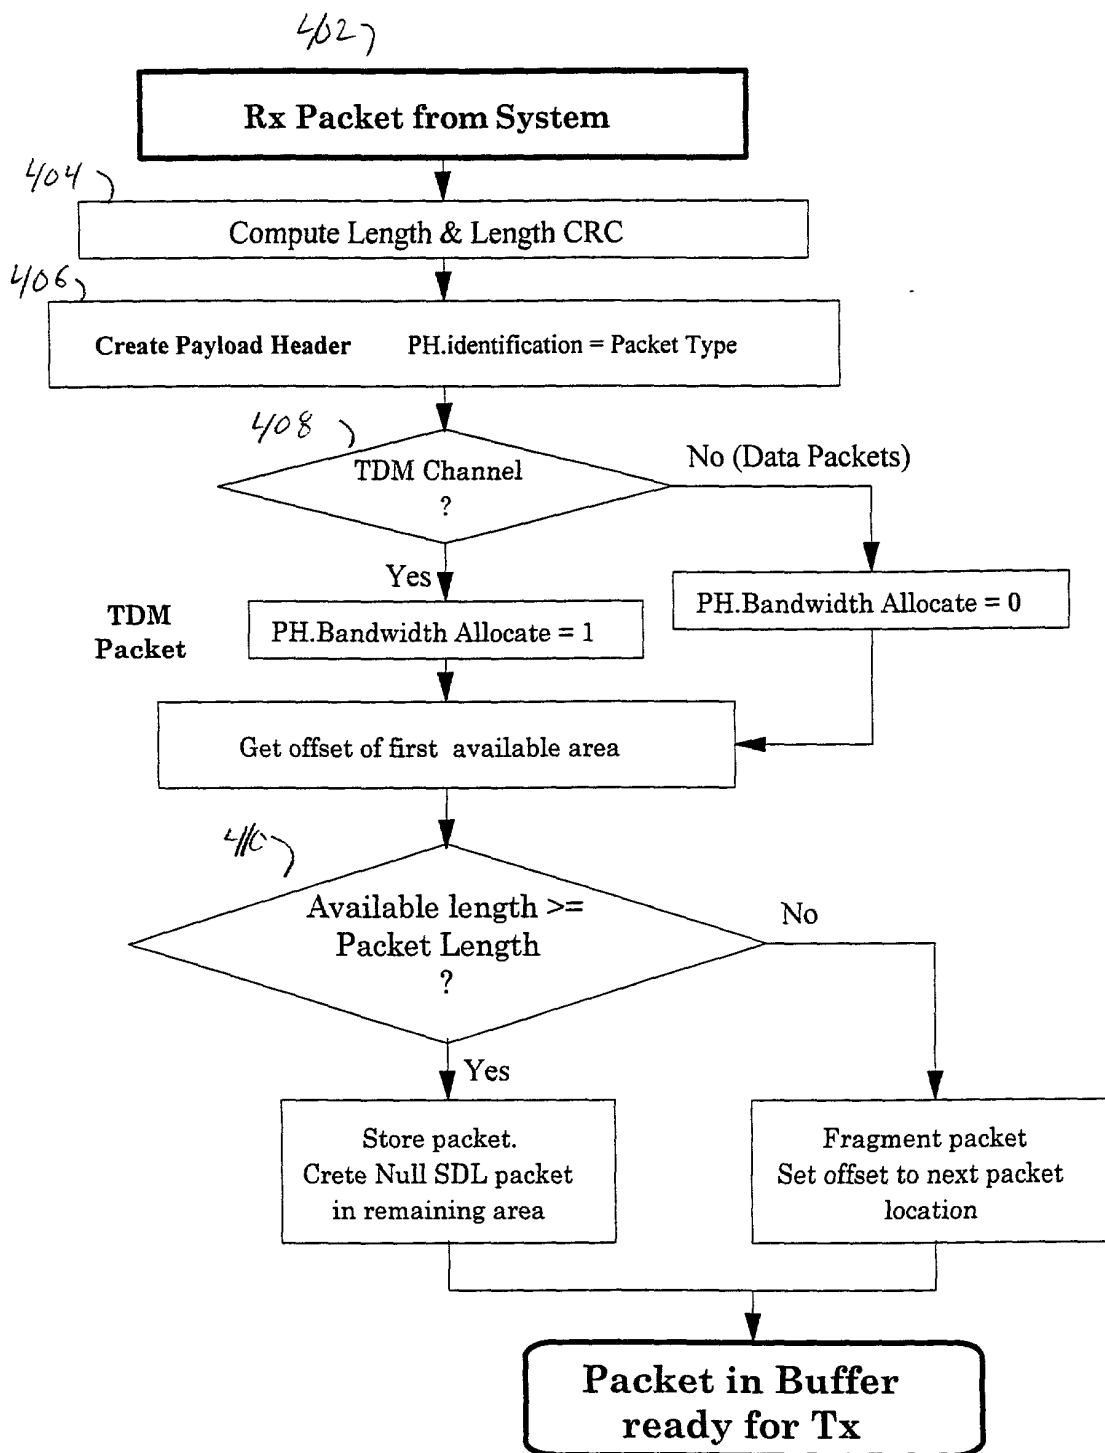


FIG.12

Docket No. 0325.00371

# **DECLARATION, POWER OF ATTORNEY AND PETITION**

I, the undersigned inventor, hereby declare that:

My residence, post office address and citizenship are given next to my name;

I believe that I am the first, original and sole inventor of the subject matter claimed in the application for patent entitled "**HYBRID DATA TRANSPORT SCHEME OVER OPTICAL NETWORKS**", which:

X is submitted herewith;

\_\_\_\_\_ was filed on \_\_\_\_\_ as Application Serial No. \_\_\_\_\_ and amended on \_\_\_\_\_;

I have reviewed and understand the contents of the above-identified application for patent (hereinafter, "this application"), including the claims;

I acknowledge the duty under Title 37, Code of Federal Regulations, Section 1.56, to disclose to the United States Patent and Trademark Office information known to be material to the patentability of this application. I also acknowledge that information is material to patentability when it is not cumulative to information already provided to the United States Patent and Trademark Office and when it either

compels, by itself or in combination with other information, a conclusion that a claim is unpatentable under the preponderance of evidence standard, giving each term in the claim its broadest reasonable construction consistent with the application, and before any consideration is given to evidence which may be submitted to establish a contrary conclusion of patentability, or

refutes or is inconsistent with a position taken in either (i) asserting an argument of patentability, or (ii) opposing an argument of unpatentability relied on by the United States Patent and Trademark Office;

I hereby claim the priority benefit under Title 35, Section 119(e), of the following United States provisional patent applications:

Application No.

Filing Date

I hereby claim the priority benefit under Title 35, Section 120, of the following United States patent applications:

Serial No.

Filing Date

Status

0325.00371-07.14.00

Docket No. 0325.00371

Page 2 of 2

I hereby claim the priority benefit under Title 35, Section 365(c), of the following PCT International patent applications designating the United States:

Application No.Filing Date

Where the subject matter of the claims of this application is not disclosed in the United States or PCT priority patent applications identified above, I acknowledge the duty to disclose information known to be material to the patentability of this application that became available between the filing dates of this application and of the priority United States or PCT patent applications.

I hereby appoint as my attorneys with full power of substitution to prosecute this application and conduct all business in the United States Patent and Trademark Office associated with this application: Customer No. 021363.

**21363**

PATENT TRADEMARK OFFICE

I declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of this application or any patent issuing thereon.

Pankaj K. Jha

Inventor

  
Signature of Inventor

Date

July 13, 2000

Post Office Address:

42613 Fern CircleFremont, CA 94538Citizen of: IndiaResidence: 42613 Fern CircleFremont, CA 94538

004720" 95597960